



Model No:
DL-7203E


Quick Installation Guide

4G LTE mobile Wi-Fi



Version 1.00
(English | Indonesian)


1 Package Contents

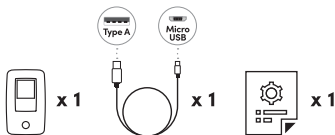

Notes:

1. The illustrations in this document may appear differently from your model
2. If any of above item is not packed in your package upon opening, please consult your reseller immediately

2 Overview

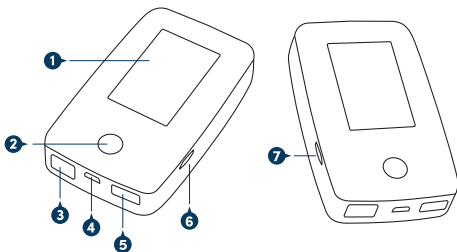

2 Overview

Interface and Buttons

- | | |
|-------------------|----------------------|
| 1. LCD display | 5. USB Type- A port |
| 2. Power button | 6. microSD card slot |
| 3. LAN port | 7. Micro SIM slot |
| 4. Micro USB port | |

3 Hardware Installation

Installing the Micro SIM card

After turning off the device, insert the Micro SIM card into the Micro SIM card slot, and then power on to work normally.

Note:

1. Make sure the size of Micro SIM card is appropriate.
2. Put the Micro SIM card metal piece upward and push it into the card slot gently. When you hear a click, it indicates that the Micro SIM card is installed in place, and ensure that the Micro SIM card is in the correct direction.
3. Push the Micro SIM card in slightly, and then release it completely to eject the Micro SIM card.

Charge the battery

If the unit has not been used for a long time or the battery is completely depleted, the unit may not power up immediately after the charger is plugged in. Please charge the battery for a period of time before trying to turn it on.

Note:

1. Use only chargers that are compatible with this unit and supplied by the specified manufacturer. Using an incompatible charger or a charger from an unknown manufacturer may cause MiFi failure, malfunction, or even fire.
2. Recharge battery: connect the provided USB cable to DL-7203E's micro USB port
3. Power bank: work as a power bank to charge other devices by connecting through DL-7203's USB-A port

3 Hardware Installation

Power On the device

Press and hold the power button for 5-10 seconds until power is turned on.

Use 4G network

The management parameters of this machine have been preset according to the requirements. It will automatically connect to the Internet.

Note:

You can log in to the web administration page and enable or disable automatic connections.

4 Web-based Configuration


1. Connecting to the device

A. With Wi-Fi connection

- Use your normal Wi-Fi application on the client to search for the available wireless network
- Select the SSID of your device (default SSID Prolink_XXXX) to connect
- Default password is prolink12345


B. With USB connection

- Connect the device with USB cable into Computer USB port
- AutoRun pop-up window will appear > Select the driver and install accordingly

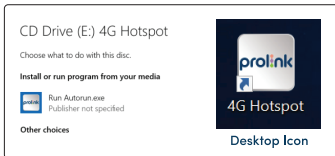


4 Web-based Configuration

2. Open the browser and enter `http://192.168.1.1` or `http://m.home`, Enter default Username : **admin** and Password: **password** to login

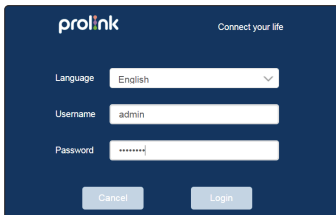

The image shows the Prolink login interface. At the top left is the 'prolink' logo, and at the top right is the text 'Connect your life'. Below this are three input fields: 'Language' with a dropdown menu showing 'English', 'Username' with the text 'admin', and 'Password' with masked characters '*****'. At the bottom are two buttons: 'Cancel' and 'Login'.

3. Click the upper right corner – Modify Login Password to change the default login password

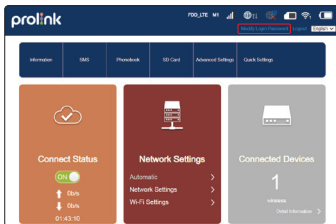

4 Web-based Configuration

The screenshot shows the 'Login Password' configuration page. It has a blue header with a back arrow and the title 'Login Password'. Below the header, there are three input fields labeled 'Current Password *', 'New Password *', and 'Confirm New Password *'. To the right of these fields is an 'Apply' button. Below the input fields, a light blue banner contains the text: 'When you log in wireless router, need to input this password (password is different from your wireless network password)'. At the bottom left, there is a help icon (a question mark inside a circle).

4. Click Wi-Fi Settings to change default SSID and password

The screenshot shows the 'Wi-Fi Settings' configuration page. It has a blue header with a back arrow and the title 'Wi-Fi Settings'. Below the header, a subtitle reads: 'Set up wireless hotspot so that your mobile phone or laptop could access network via it'. On the left side, there is a sidebar menu with options: 'Main SSID' (highlighted in orange), 'Guest SSID', 'WPS', 'Internet W-Fi', 'Advanced Settings', and 'WLAN MAC Filter'. The main content area is titled 'Main SSID' and contains the following settings: 'Wi-Fi Switch' with 'Enable' selected (radio button), 'Multi SSID Switch' with 'Disable' selected (radio button), 'Network Name (SSID) *' with the value 'Proair_0001' in the input field, 'SSID Broadcast' checked (checkbox), 'Security Mode' with 'WPA2AES-PSK' selected in the dropdown menu, 'Pass Phrase *' with a masked password in the input field, and a 'Display Password' checkbox which is unchecked. An 'Apply' button is located on the right side of the settings area.

4 Web-based Configuration

5. APN settings (If SIM card's APN cannot be found by Auto Mode)


- 1) Click Network Settings
- 2) Select Mode to Manual
- 3) Click Add New button to enter the correct APN settings accordingly
- please consult your SIM card operator.

The screenshot displays the 'Connection Settings' web interface. On the left, a sidebar contains three menu items: 'Connection Mode', 'Network Selection', and 'APN', with 'APN' currently selected and highlighted in orange. The main content area is titled 'APN' and contains the following fields and options:

- Current APN:** Displays '333'.
- Mode:** Includes radio buttons for 'Auto' and 'Manual', with 'Manual' selected.
- Profile:** A dropdown menu showing 'Default' and an 'Add New' button.
- PDP Type:** A dropdown menu showing 'IPv4v6'.
- Profile Name:** A text input field containing 'Default'.
- APN:** A text input field containing 'Default'.
- DNS Mode:** Includes radio buttons for 'Auto' and 'Manual'.
- Authentication:** A dropdown menu showing 'NONE'.
- User Name:** An empty text input field.
- Password:** An empty text input field.
- Dial No.:** An empty text input field.

A blue question mark icon is located at the bottom left of the main content area.


1 Isi Kemasan

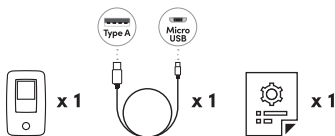

Nota:

1. Ilustrasi dalam dokumen ini mungkin tampak berbeda dari model Anda
2. Jika salah satu item di atas tidak dikemas dalam paket Anda saat dibuka, harap segera berkonsultasi dengan reseller Anda

2 Keterangan Gambar

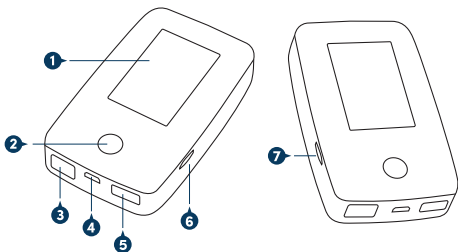

2 Keterangan Gambar

Antaramuka dan Tombol

1. Layar LCD
2. Tombol Power
3. Port LAN
4. Port USB Mikro
5. Port USB Type- A
6. Slot kartu microSD
7. Slot kartu SIM Mikro

3 Instalasi Perangkat Keras

Memasang kartu SIM Mikro

Setelah mematikan perangkat, masukkan kartu SIM Mikro ke dalam slot kartu SIM Mikro, lalu hidupkan untuk bekerja secara normal.

Nota:

1. Pastikan ukuran kartu SIM Mikro sesuai.
2. Letakkan potongan logam kartu SIM Mikro ke atas dan dorong ke dalam slot kartu dengan lembut. Saat Anda mendengar bunyi klik, ini menunjukkan bahwa kartu SIM Mikro terpasang di tempatnya, dan memastikan bahwa kartu SIM Mikro berada di arah yang benar.
3. Dorong kartu SIM Mikro sedikit, lalu lepaskan sepenuhnya untuk mengeluarkan kartu Sim Mikro.

Isi baterai

Jika unit tidak digunakan untuk waktu yang lama atau baterai benar-benar habis, unit mungkin tidak langsung menyala setelah pengisi daya dicolokkan. Harap isi daya baterai selama beberapa waktu sebelum mencoba menyalakannya.

Nota:

1. Gunakan hanya pengisi daya yang kompatibel dengan unit ini dan dipasok oleh pabrikan yang ditentukan. Menggunakan pengisi daya yang tidak kompatibel atau pengisi daya dari pabrikan yang tidak dikenal dapat menyebabkan kegagalan MiFi, kegagalan fungsi, atau bahkan kebakaran.
2. Isi ulang baterai: sambungkan kabel USB yang disediakan ke port micro USB DL-7203E
3. Bank daya: berfungsi sebagai bank daya untuk mengisi daya perangkat lain dengan menghubungkan melalui port USB-A DL-7203

3 Instalasi Perangkat

Nyalakan perangkat

Tekan dan tahan tombol daya selama 5-10 detik hingga daya dihidupkan.

Gunakan jaringan 4G

Parameter manajemen mesin ini telah ditetapkan sesuai dengan persyaratan. Secara otomatis akan terhubung ke Internet.

Nota:

Anda dapat masuk ke halaman administrasi web dan mengaktifkan atau menonaktifkan otomatis koneksi.

4 Pengaturan melalui halaman Web


1. Menghubungkan ke perangkat

A. Dengan koneksi Wi-Fi

- Gunakan aplikasi Wi-Fi normal Anda di klien untuk mencari jaringan nirkabel yang tersedia
- Pilih SSID perangkat Anda (SSID default Prolink_xxxx) untuk terhubung
- Kata sandi default adalah prolink12345


B. Dengan koneksi USB

- Hubungkan perangkat dengan kabel USB ke port USB Komputer
- Jendela pop-up AutoRun akan muncul > Pilih driver dan instal demikian

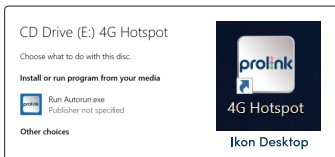


4 Pengaturan melalui halaman Web

2. Buka browser dan masukkan `http://192.168.1.1` atau `http://m.home`, Enter default Nama Pengguna: admin dan Kata Sandi: kata sandi untuk masuk

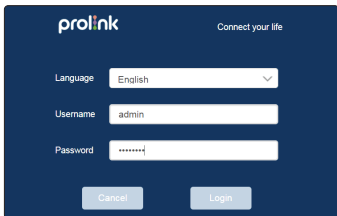

The image shows the Prolink login interface. At the top left is the 'prolink' logo, and at the top right is the text 'Connect your life'. Below this are three input fields: 'Language' with a dropdown menu showing 'English', 'Username' with the text 'admin', and 'Password' with masked characters '*****'. At the bottom are two buttons: 'Cancel' and 'Login'.

3. Klik pojok kanan atas – Ubah Kata Sandi Masuk untuk mengubah kata sandi masuk default

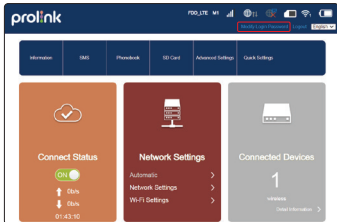

4 Pengaturan melalui halaman Web

← Login Password

Current Password *

New Password *

Confirm New Password *

Apply

When you log in wireless router, need to input this password (password is different from your wireless network password)

?

4. Klik Pengaturan Wi-Fi untuk mengubah SSID dan kata sandi default

← Wi-Fi Settings

Set up wireless hotspot so that your mobile phone or laptop could access network via it

Main SSID

Wi-Fi Switch ☒ Enable ☐ Disable

Multi SSID Switch ☐ Enable ☒ Disable

Apply

Main SSID

Network Name (SSID) *

☒ SSID Broadcast

Security Mode

Pass Phrase *

☐ Display Password

4 Pengaturan melalui halaman Web

5. Pengaturan APN (Jika APN kartu SIM tidak dapat ditemukan dengan Mode Otomatis)
- 1) Klik Network Settings
 - 2) Pilih Mode to Manual
 - 3) Klik tombol Add New untuk memasukkan pengaturan APN yang benar sesuai - silakan berkonsultasi dengan operator kartu SIM Anda

The screenshot displays the 'Connection Settings' web interface. On the left, a sidebar contains three main sections: 'Connection Mode', 'Network Selection', and 'APN'. The 'APN' section is currently selected and highlighted in orange. The main content area is titled 'APN' and contains the following fields and options:

- Current APN:** A text input field.
- Mode:** Radio buttons for 'Auto' and 'Manual'. The 'Manual' option is selected.
- Profile:** A dropdown menu with 'Default' selected. An 'Add New' button is located to the right of the dropdown.
- POP Type:** A dropdown menu with 'IPv4v6' selected.
- Profile Name:** A text input field with 'Default' entered.
- APN:** A text input field with 'Default' entered.
- DNS Mode:** Radio buttons for 'Auto' and 'Manual'. The 'Auto' option is selected.
- Authentication:** A dropdown menu with 'NONE' selected.
- User Name:** A text input field.
- Password:** A text input field.
- Dial No.:** A text input field.

At the bottom left of the main content area, there is a blue circular icon with a white question mark.

Worldwide Customer Care Centers

INDONESIA Office

PT PROLINK INTIDATA NUSANTARA

Walk-In : Jl. Cideng Barat No. 79, Jakarta Pusat 10150, Indonesia.

Telephone : +62 21 3483 1777

Sale Enquiries : sales.id@prolink2u.com

Technical Support : support.id@prolink2u.com

MALAYSIA Office

FIDA SYSTEMS (M) SDN BHD

Walk-In : 29 Jalan USJ 1/31, 47600 Subang Jaya, Selangor Darul Ehsan, Malaysia.

Telephone : +60 3 8024 9151

Sale Enquiries : sales.my@prolink2u.com

Technical Support : support.my@prolink2u.com

SINGAPORE Office

FIDA INTERNATIONAL (S) PTE LTD

Walk-In : Block 16 Kallang Place #06-02, Kallang Basin Industrial Estate, Singapore 339156.

Telephone : +65 6357 0668

Sale Enquiries : sales@prolink2u.com

Technical Support : support@prolink2u.com

Technical Support Hotline

INDONESIA : +62 21 3483 1717

MALAYSIA : +60 3 8023 9151

SINGAPORE : +65 6357 0666

Note: Closed on Saturdays, Sundays and local/regional Public Holidays.

Register online for your Product Warranty at www.prolink2u.com

Prolink is a registered trademark of Fida International (S) Pte Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Product images are purely for illustrative purposes and may differ from the actual product. Specifications are subjected to changes without prior notice. Copyright © 2021 Fida International (S) Pte Ltd.